








PROJECT STAGE	EROSION CONTROL BMP NUMBER	BMP DESCRIPTION	DATE INSTALLED	DATE REMOVED
A - PRE-CONSTRUCTION	A1	LDP SITE SIGN DISPLAYED, SWPPP AVAILABLE		
	A2	EQUIPMENT AND MATERIAL YARDS DETERMINED		
	A3	LOCATION OF PORTABLE TOILET AND TRASH DUMPSTER DETERMINED		
	A4	CONSTRUCTION EXIT		
	A5	INLET PROTECTION FOR EXISTING INLETS		
	A6	COMPOST FILTER SOCK		
B - CLEARING AND MASS GRADING	B1	DUST CONTROL		
	B2	TEMPORARY SEEDING		
	B3	STOCKPILE PROTECTION		
C - BUILDING CONSTRUCTION	C1	CONCRETE WASH-OUT PIT		
	C2	INLET PROTECTION FOR NEW INLETS		
	C3	TRASH DUMPSTER UTILIZED ACCORDINGLY		
D - FINAL STABILIZATION	D1	SOD / SEED / STRAW		
	D2	EROSION CONTROL PRODUCT		

TEMP. EROSION CONTROL NOTES:

- THIS PLAN SHOWS THE LOCATION AND DETAILS FOR PRIMARY SEDIMENT CONTROL TO BE CONSTRUCTED. THE CONTRACTOR IS RESPONSIBLE FOR CONTROLLING EROSION AND DISCHARGE OF SEDIMENT FROM THE SITE AT ALL TIMES DURING CONSTRUCTION. THE CONTRACTOR SHALL PROVIDE NECESSARY MEASURES DURING ALL PHASES OF OPERATIONS REGARDLESS OF WHETHER THEY ARE SPECIFICALLY NOTED ON THIS PLAN AND SHALL MAINTAIN AND REPLACE CONTROLS AS NECESSARY DURING THE COURSE OF HIS OPERATION.
- GRAVEL BAGS AND COMPOST SOCK OR OTHER INITIAL SEDIMENT CONTROLS SHOWN ON THIS PLAN MUST BE INSTALLED PRIOR TO ANY OTHER WORK. GRAVEL BAGS AND COMPOST SOCK OR OTHER CONTROLS SHALL BE INSPECTED AND MAINTAINED ONCE A WEEK AND AT THE HALF WAY POINT OF CONSTRUCTION.
- THE CONTRACTOR SHALL CLEAN SWEEP AND VACUUM STREETS BOTH INTERIOR AND ADJACENT TO THE SITE DAILY, AND AS NEEDED FOR THE ON-SITE INSPECTOR, AFTER EACH RAINFALL, AFTER COMPLETION OF EACH CONSTRUCTION PHASE, AND AT THE END OF CONSTRUCTION.
- THE CONTRACTOR IS RESPONSIBLE FOR CONTROLLING DUST DURING CONSTRUCTION AND SHALL WATER CONSTRUCTION AREAS WHENEVER CONDITIONS WARRANT.
- THE CONTRACTOR SHALL PREVENT STORM PIPES FROM ACCUMULATING SEDIMENT AS THEY ARE INSTALLED.
- THE CONTRACTOR IS RESPONSIBLE FOR DEWATERING AS NEEDED. DURING DEWATERING, WATER SHOULD NOT BE RETURNED DIRECTLY TO WATERWAY BUT SHALL BE PUMPED UPLAND AND FILTERED THROUGH AN APPROPRIATE TREATMENT DEVICE SUCH AS A DE-WATERING BAG.
- THE CONTRACTOR SHALL MAINTAIN AND INSPECT EROSION CONTROL MEASURES AND BEST MANAGEMENT PRACTICES THROUGHOUT CONSTRUCTION IN ACCORDANCE WITH THE CONDITIONS OF THE LAND DISTURBANCE PERMIT. COPIES OF THE LAND DISTURBANCE PERMIT AND STORM WATER POLLUTION PREVENTION PLAN SHALL REMAIN ON-SITE THROUGHOUT CONSTRUCTION.
- NO STOCKPILES ARE TO BE PLACED IN FRONT OF INLETS OR IN A DRAINAGE CHANNEL.
- CONTRACTOR SELECTED STAGING AREA SHALL PROVIDE PROTECTION FROM ALLOWING SEDIMENT, DEBRIS OR RESIDUE FROM ENTERING OR LEAVING THE PROJECT SITE. ALL STOCKPILES SHALL BE PROTECTED WITH THE APPROPRIATE BMP'S. ANY AND ALL BMP'S, REQUESTED BY OWNER, TO COMPLY WITH THE ABOVE SHALL BE INSTALLED AND MAINTAINED IMMEDIATELY BY CONTRACTOR AT THEIR EXPENSE. LOCATION SHALL BE DISCUSSED AT PRE PERMIT MEETING.

- CONSTRUCTION EXIT SHALL BE INSTALLED AS NECESSARY TO PREVENT TRACK-OUT. LOCATIONS MAY VARY DEPENDING ON CONTRACTORS SELECTED MEANS & METHODS. OWNER MAY AT ANY TIME OR FROM TIME TO TIME REQUEST ADDITIONAL EXITS, DEPENDING ON SITE CONDITIONS.
 - THE CONTRACTOR SHALL BE RESPONSIBLE FOR MAINTAINING EROSION CONTROL DEVICES DURING THE ENTIRE CONSTRUCTION PERIOD. ALL EROSION CONTROL MEASURES SHALL BE IN PLACE PRIOR TO BEGINNING CONSTRUCTION ACTIVITIES UNLESS OTHERWISE NOTED.
 - EROSION CONTROL BLANKET SHOULD BE ONE WITH ALL NATURAL MATERIALS INSTEAD OF PLASTIC NETTING SUCH AS NORTH AMERICAN GREEN BIONET OR CURLEX FIBERNET.
 - THE CONTRACTOR SHALL CONTAIN SAWCUT SLURRY AND PREVENT SLURRY FROM ENTERING STORM DRAINS.
 - THE CONTRACTOR SHALL PLACE EROSION AND SEDIMENT CONTROL BARRIERS AROUND ANY STORM INLET THAT RECEIVE STORM WATER FROM THE CONSTRUCTION AREA.
 - THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE INSTALLATION AND MAINTENANCE OF ANY ADDITIONAL BMP'S NEEDED TO KEEP SEDIMENT AND/OR POLLUTANTS FROM LEAVING THE SITE.
 - ALL AREAS DISTURBED, CUT, GRADED OR LEFT WITHOUT GRASS WILL NEED PERMANENT STABILIZATION WITHIN 14 DAYS.
 - IF STABILIZATION CANNOT BE ACHIEVED WITHIN 14 DAYS, TEMP BMP'S WILL BE REQUIRED, THESE ADDITIONAL BMP'S AS REQUESTED BY OWNER ARE CONSIDERED INCIDENTAL TO CONTRACT.
 - REFER TO STORM WATER POLLUTION PREVENTION PLAN (SWPPP).
 - ALL CHANGES TO ESC PLAN AND PHASES NEED TO BE APPROVED BY THE CITY'S WATER QUALITY INSPECTOR.
 - ALL TYPE II ROCK BLANKETS SHALL BE CONSTRUCTED OF WELL GRADED GRANULAR BACKFILL AS PER DETAIL STANDARDS.
- NOTE:**
PRIOR TO THE INSTALLATION OF ANY RECP ON-SITE, THE CONTRACTOR MUST ARRANGE AN ON-SITE MEETING WITH THE CITY OF SPRINGFIELD SWPPP INSPECTOR, TO SCHEDULE THE MEETING, PLEASE CONTACT 417-864-2087. THE PURPOSE OF THIS MEETING IS TO VERIFY THAT ALL RECP'S ARE INSTALLED IN THE DESIGNATED LOCATIONS AS SPECIFIED IN THE PLAN, AND THAT THEY ARE INSTALLED IN ACCORDANCE WITH THE DETAILS OUTLINED IN THE PLAN SET.

EROSION CONTROL LEGEND:

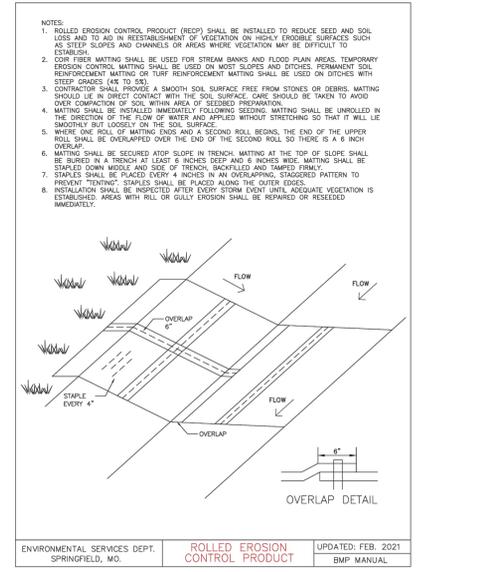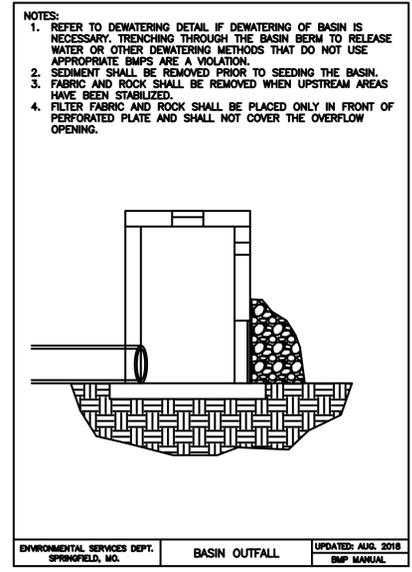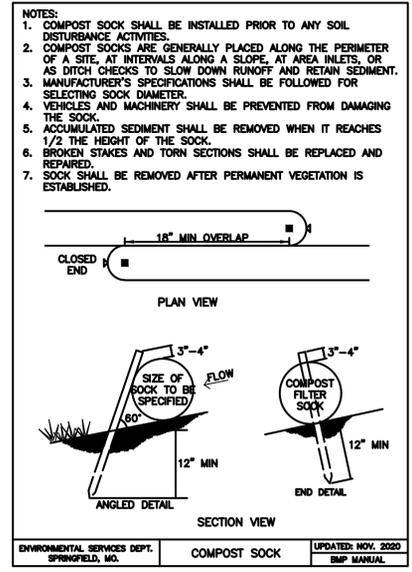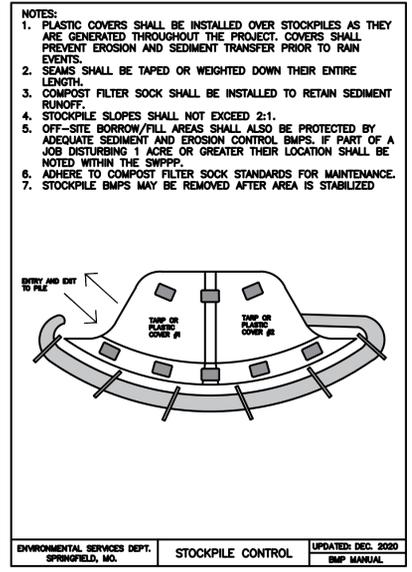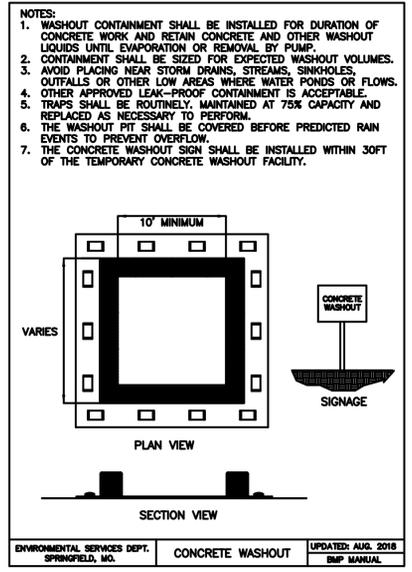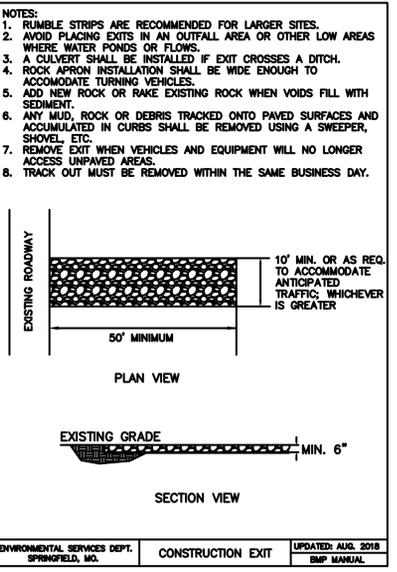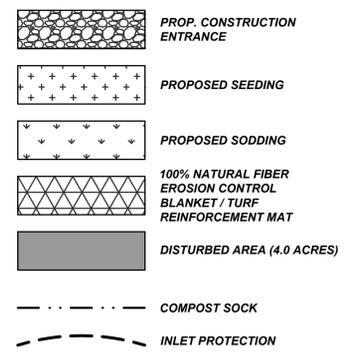

CHAMBERLAIN ARCHITECTS, P.C.
3223 E Farm Road 34
Fair Grove, Missouri 65648
417-880-1396 ph
chamberlainarchitects36@gmail.com



Prepared by:
CJW
CJW Transportation Consultants, L.L.C.
5051 S. National Suite 7A
Springfield, MO 65810
Tel: 417.889.3400
Fax: 417.889.3402
www.CJW.com

PROJECT TITLE:
**FISK LIMOUSINE SERVICE
3601 E CHESTNUT EXPRESSWAY
GREENE COUNTY
SPRINGFIELD, MISSOURI**

© COPYRIGHT CAPC 2024
THESE PLANS ARE COPYRIGHTED AND ARE SUBJECT TO COPYRIGHT PROTECTION UNDER SECTION 102 OF THE COPYRIGHT ACT OF 1990. THE PROTECTION INCLUDES BUT IS NOT LIMITED TO THE OVERALL FORM AS WELL AS THE ARRANGEMENT AND COMPOSITION OF THE SPACES AND ELEMENTS OF THE DESIGN. UNAUTHORIZED USE OF THESE PLANS CAN LEGALLY RESULT IN THE CESSATION OF CONSTRUCTION OF THE PROJECT BEING SEIZED AND/OR MONETARY COMPENSATION TO CHAMBERLAIN ARCHITECTS P.C.

PROJ. NO. 2312001
CAD FILE: 806 & EROSION CONTROL PLAN
DRAWN BY: CJW
DATE: 06/24/2025
REVISION:
DWG. NO. **C4.0**
SOIL & EROSION CONTROL PLAN